



# Himalaya G12 Series 625-645W

120-cell Bifacial HJT Half Cell  
Double-glass Solar Module

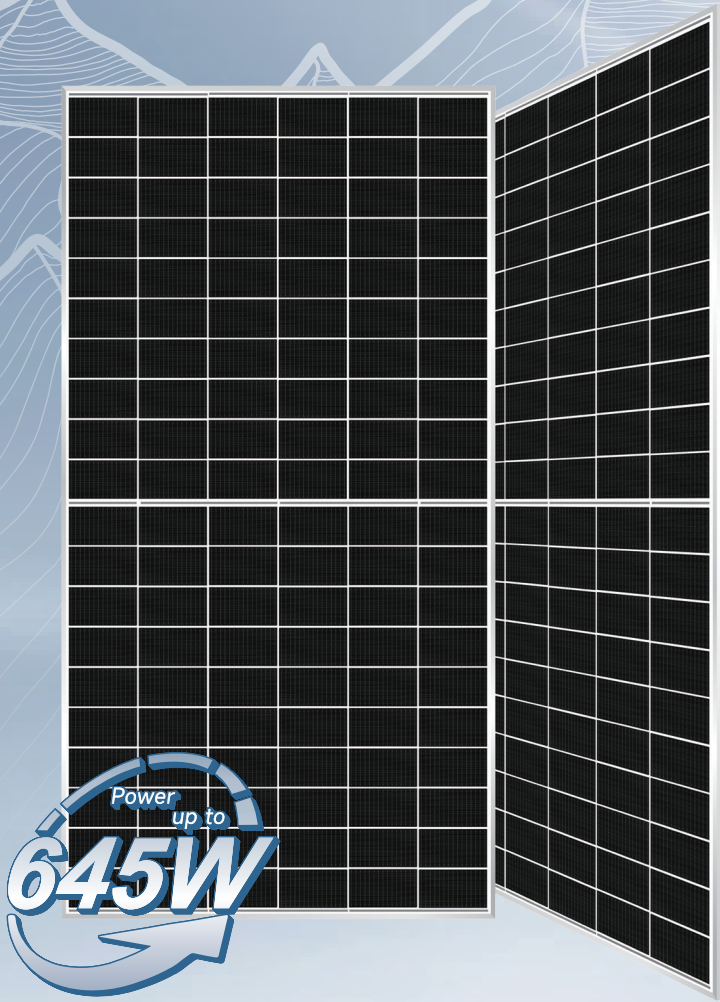

### HJT 2.0 Technology

Combining gettering process and single-side  $\mu\text{c-Si}$  technology to ensure higher cell efficiency and higher module power.



### -0.24%/°C Pmax temperature coefficient

More stable power generation performance and even better in hot climate.



### SMBB design with Half-Cut Technology

Shorter current transmission distance, less resistive loss and higher cell efficiency.



### Up to 90% Bifaciality

Natural symmetrical bifacial structure bringing more energy yield from the backside.



### Sealing with PIB based sealant

Stronger water resistance, greater air impermeability to extend module lifespan.



### Higher reliability

Industrial leading product and performance warranty, ensuring modules' consistent outstanding performance.



### Suitable for Utility project

Lower BOS cost, lower LCOE

## WARRANTY

Product  
Warranty **15**  
years

Linear  
Power  
Warranty **30**  
years



ANHUI HUASUN ENERGY CO., LTD.

All rights reserved © 2020-2023  
File No. HS-T2-SM-0009 Ver. 2.0 Page 1 of 2



The specification and key features described in this datasheet may deviate slightly and are not guaranteed. Anhui Huasun reserves the right to make any adjustment to the information described herein at any time without notice. Please always obtain the latest version of the datasheet which shall be duly incorporated into the binding contract made by the parties governing all transactions related to the purchase and sale of the products described herein.


# Himalaya G12 Series 625-645W

## 120-cell Bifacial HJT Half Cell Solar Module

- BloombergNEF Tier 1 PV module manufacturer
- Reinsurance underwritten by Ariel Re

### Engineering Drawings

Unit: mm

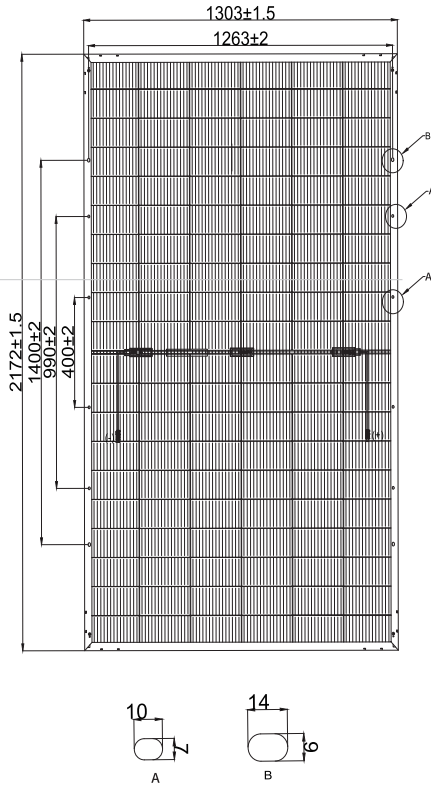

### Electrical Characteristics (STC\*)

HS-210-B120	DS625	DS630	DS635	DS640	DS645
Maximum Power (Pmax)	625W	630W	635W	640W	645W
Module Efficiency (%)	22.08%	22.26%	22.44%	22.61%	22.79%
Optimum Operating Voltage (Vmp)	37.86V	38.03V	38.19V	38.35V	38.51V
Optimum Operating Current (Imp)	16.51A	16.57A	16.63A	16.69A	16.75A
Open Circuit Voltage (Voc)	45.13V	45.30V	45.48V	45.65V	45.82V
Short Circuit Current (Isc)	17.31A	17.37A	17.43A	17.49A	17.55A
Operating Module Temperature	-40 ~ +85 °C				
Maximum System Voltage	DC1500V (IEC)				
Maximum Series Fuse	35A				
Power Tolerance	0~+5W				
Bifaciality	85% ± 5%				

\*STC: Irradiance 1000 W/m<sup>2</sup>, cell temperature 25 °C, AM=1.5. Tolerance of Pmax is within +/- 3%.

### BSTC\*\*

Maximum Power (Pmax)	690W	695W	700W	705W	710W
Optimum Operating Voltage (Vmp)	37.86V	38.03V	38.19V	38.35V	38.51V
Optimum Operating Current (Imp)	18.23A	18.28A	18.33A	18.39A	18.44A
Open Circuit Voltage (Voc)	45.13V	45.30V	45.48V	45.65V	45.82V
Short Circuit Current (Isc)	19.11A	19.16A	19.21A	19.27A	19.32A

\*\*BSTC: Front side irradiation 1000W/m<sup>2</sup>, back side reflection irradiation 135W/m<sup>2</sup>, AM=1.5, ambient temperature 25 °C.


### Temperature Characteristics

Nominal Operating Cell Temp. (NOCT)	44 °C ± 2 °C
Temperature Coefficient of Pmax	-0.24%/°C
Temperature Coefficient of Voc	-0.24%/°C
Temperature Coefficient of Isc	0.04%/°C

### Safety & Warranty

Safety Class	Class II
Product Warranty	15 yrs Workmanship
Performance Warranty	30 yrs Linear Warranty*

\* Less than 1% attenuation in the 1st year, the annual attenuation from the 2nd year is no more than 0.375%, and the power is no less than 88% until the 30th year.

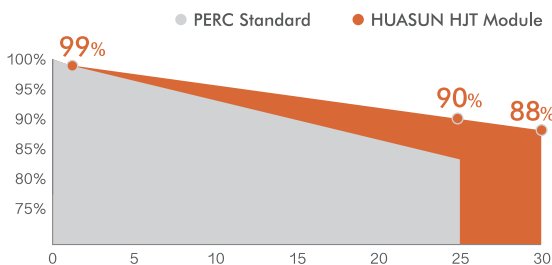

\* Refer to HUASUN standard warranty for details

### Mechanical Characteristics

Cell Type	HJT Mono 210 × 105mm
Cell Connection	120 (6 × 20)
Module Dimension	2172 × 1303 × 35 mm
Weight	35.3 kg
Junction Box	IP68
Output Cable	4mm <sup>2</sup> , 300mm in length, length can be customized / UV resistant
Connectors Type	MC4/ MC4-Evo2A/ PV-H4/Z45-abcd/ ST4
Frame	Anodised aluminum alloy
Front Load	5400 Pa
Rear Load	2400 Pa
Glass Thickness	Double glass, 2.0mm

### Shipping Configurations

Container Size	HC
Pallets Per Container	18
Modules Per Pallet (pcs)	31
Modules Per Container (pcs)	558

ANHUI HUASUN ENERGY CO., LTD.

All rights reserved © 2020-2023  
File No. HS-T2-SM-0009 Ver. 2.0 Page 2 of 2

NO.99 Qingliu Road, Economic and Technological Development Zone, Xuancheng, Anhui, China  
Tel: 0086-563-3318095 www.huasunsolar.com  
sales@huasunsolar.com customerservice@huasunsolar.com